## **SLOAN VAL** VF

## SLOAN. **Royal / Regal Rebuild Kits** Cat.#06224

Model#A-38-A A156A Diaphragm Style Comes with relief valve, diaphragm, disc and guide assembly for rebuilding Royal and Regal Flushometers. V6000 series. 3.5 GPF closet.



### SLOAN. Royal / Regal Rebuild Kits Cat.#06218 Model#A-37-A A156A Diaphragm Style.

Comes with relief valve, diaphragm, disc and guide assembly for rebuilding Royal and Regal Flushometers. V6000 series. 1.5 GPF urinal.



## SLOAN. **Electronic Modules** Cat.#22827

Model#EBV-146-A-U For Optima G2 urinal flush valve. Universal flush style for 0.5 GPF, 1.0 GPF, 1.5 GPF and 3.5 GPF.



SLOAN. **Royal / Regal Rebuild Kits** Cat.#11967

Model# A-41-A A156A Diaphragm Style Comes with relief valve, diaphragm, disc and guide assembly for rebuilding Royal and Regal Flushometers. V6000 series. 1.6 GPF closet.



## SLDAN Royal / Regal Rebuild Kits Cat.#22351

Model#A-42-A A156A Diaphragm Style Comes with relief valve, diaphragm, disc and guide assembly for

rebuilding Royal and Regal Flushometers. V6000 series. 1.0 GPF urinal.



## SLOAN. **Electronic Modules** Cat.#22829

Model# EBV-146-A-C For Optima G2 closet flush valve. Universal flush style for 1.6

GPF, 2.4 GPF, 3.5 GPF and 4.5 GPF.



3312 RAMONA DRIVE, FORT WORTH, TX 76116 WWW.MARKSPP.COM







# **SLOAN VAI**

## SLDAN Single-Flush Side Mount Operator Cat#33544

Model#EBV-500-A

Battery-powered, sensor-activated, single-flush retrofit conversion kit for exposed closet and urinal flushometers. Can be used on standard rough-in Sloan, Royal, Regal, Crown, and Naval brand flushometers. Smart Sense Technology™: Applies extended range and logic techniques to significantly reduce water usage in high use urinal applications, such as when a continuous line of people forms. The maximum amount of water used is only 2.0 gallons.

Automatic Operation: Activated via multi-lobular infrared sensor. The sensor sets the flushing mechanism when user is detected and completes the flush when the user steps away.

Manual Operation: Flushometers are activated manually by pushing the black TMO button.

Hygienic: Touchless, sensor activation eliminates the need for user contact except to initiate the True Mechanical Override button when required, to help control the spread of infectious diseases. The 72-hour Sentinel Flush keeps fixture fresh during periods of non-use.

## SLOAN. Side Mount Operator Cat.#06111

Easily converts your manual flushometer to modern water saving electronics. Cover is chrome plated metal. The Sloan side mount operator gives you these extra features and benefits:

- Programmable automatic flushing system
- Tempered glass lens
- Adjustable infrared sensing
- Low battery light notification
- Courtesy Flush<sup>™</sup> button
- · Chrome metal cover for easy cleaning
- Standard "C" batteries supplied
- · Money savings two minute installation
- Time savings no water shut off required for installation
- Improved hygiene
- Fixtures stay cleaner
- Quick battery replacement no need to shut off water
- Helps eliminate odors
- · Increased water savings with electronics
- ADA compliant



## For Sloan Royal®, Regal **Pro® and Regal®**

## SLOAN **Regal®** Flushometer Cat.#13631


#### Model#110 XL with 1-1/2" x 9" 3.5 GPF Vacuum Breaker

Exposed type flushometer for floor mounted or wall hung bowls with 1-1/2" exposed top spud includes the following features: quiet, exposed diaphragm type, closet flushometer, chrome plated, metal oscillating non-hold-open handle, 1" IPS screwdriver Bak-Chek® angle stop with protective cap, adjustable tailpiece, vacuum breaker flush connection and spud coupling for 1-1/2" top spud, wall and spud flanges.

## SLOAN. **Regal®** Flushometer Cat.#06246

### Model#186-1 XL with 1-1/2" x 3/4" x 9" 1.0 GPF Vacuum Breaker

Includes the following features: quiet, exposed diaphragm type, urinal flushometer, chrome plated, metal oscillating non-hold-open handle, 3/4" IPS screwdriver Bak-Chek® angle stop with protective cap, adjustable tailpiece, vacuum breaker flush connection and spud coupling for 3/4" top spud, wall and spud flanges.

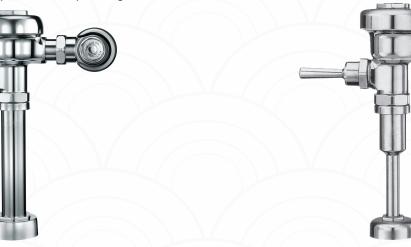

Mark's

**CALL US NOW** 



3312 RAMONA DRIVE, FORT WORTH, TX 76116 WWW.MARKSPP.COM